










Delivering consistent quality since 2014



We're in the making of a wide range of Steel Valves, Forging Valves, Victaulic Type Coupling, Vertical Check Valves, SS Globe/Gate Valves Thread, SS Needal Valve, SS Pipe Fitting, SS Ball Valve, Industrial Valve etc..

## What Define Us?

-  Unique Designs
-  High Efficiency
-  Long lasting
-  Eco-friendly
-  Prompt delivery
-  Widely applicable in many sectors

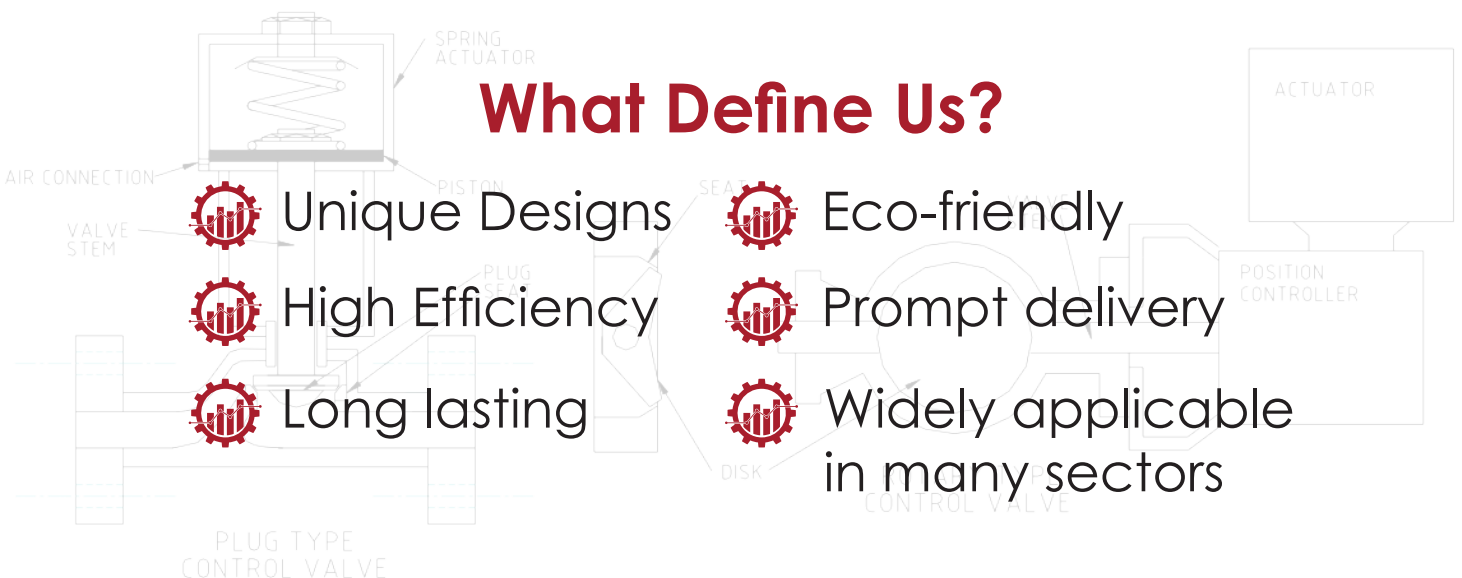

## FORGED STEEL GATE VALVE



### FEATURES:

REDUCED OR FULL PORT LIFT OR SWING CHECK VALVE SPIRAL WOUND GASKET OF STAINLESS STEEL BOLTED CAP SOCKET WELD OR THREADED ENDS REPLACEABLE OR INTEGRAL HARD FACED SEAT

BOLTED BONNET SPIRAL WOUND GASKET OF STAINLESS STEEL COMPACT OUTSIDE SCREW & YOKE REPLACEABLE HARD FACED SEATS

### APPLICABLE STANDARDS:

BASIC DESIGN, MS-SP118 & ANSI B16.34, SOCKET-WELD (S.W) ANSI B16.11, THREADED END (S.E) ANSI B1.20.1, VALVE TEST AND INSPECT : API 598, STANDARD MATERIAL : A105N, LF2, F5, F11, F22, F304, F304L, F316, F316L

BASIC DESIGN, API 602 & ANSI B16.34, FLANGED END, ANSI B16.5, FACE TO FACE ANSI B16.10 VALVE TEST AND INSPECT : API 598, STANDARD MATERIAL : A105N, LF2, F5, F11, F22, F304, F304L, F316, F316L

## FORGED STEEL CHECK VALVE




### FEATURES:

BOLTED CAP, SPIRAL WOUND GASKET OF STAINLESS STEEL, LIFT CHECK VALVE, INTEGRAL OR REPLACEABLE HARD FACED SEATS REDUCED OR FULL PORT COMPACT OUTSIDE SCREW & YOKE SPIRAL WOUND GASKET OF STAINLESS BOLTED BONNET SOCKET WELD OR THREADED ENDS REPLACEABLE HARD FACED SEATS

### APPLICABLE STANDARDS:

BASIC DESIGN, MS-SP-118 & ANSI B16.34, FACE TO FACE ANSI B16.10, FLANGED END (F.E) ANSI B16.5, VALVE TEST AND INSPECT : API 598, STANDARD MATERIAL : A105N LF2, F5, F11, F22, F304, F304L, F316, F316L

## FORGED STEEL GLOBE VALVE

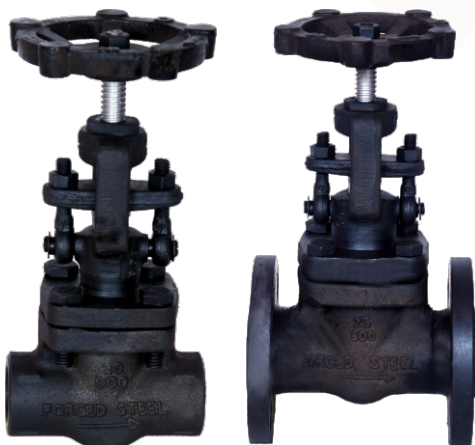

### FEATURES:

REDUCED OR FULL PORT COMPACT OUTSIDE SCREW & YOKE SPIRAL WOUND GASKET OF STAINLESS STEEL BOLTED BONNET SOCKET WELD OR THREADED ENDS INTEGRAL HARD FACED SEAT.

BOLTED BONNET SPIRAL WOUND GASKET OF STAINLESS STEEL INTEGRAL HARD FACED SEAT COMPACT OUTSIDE SCREW & YOKE

### APPLICABLE STANDARDS:

BASIC DESIGN, BS 5352 & ANSI B16.34 SOCKET-WELD (S.W) ANSI B16.11 THREADED END (S.E) ANSI B1.20.1 VALVE TEST AND INSPECT API 598 STANDARD MATERIAL : A105N, LF2, F5, F11, F22, F304L, F316, F316L

BASIC DESIGN, BS 5352 & ANSI B16.34 FACE TO FACE ANSI B16.10 FLANGED END (F.E), ANSI B16.5 VALVE TEST AND INSPECT API 598 STANDARD MATERIAL : A105N, LF2, F5, F11, F22, F304, F304L, F316, F316L

## SS GATE VALVES



**Available Size** : 15mm to 50mm  
**Pressure** : 1000 PSI  
**Stem** : S.S 304, S.S 316  
**End Connection** : BSP NPT Thread  
**Material** : S.S 304, S.S 316 etc..  
**Disc Seat** : Metal to Metal

## SS GLOBE VALVES




## SGI VICTAULIC TYPE COUPLING SHREEKAR

**Available Size** : 3/4" to 12 "  
**Style** : 77 / 75  
**Material** : SGICasting  
**Rubber** : Nitrile / EPDM / Cilicone  
**Nut Bolt** : MS, Carriage Bolt / Hex Bolt  
**Working Pressure** : 40kg to 70kg




## FOUR WAY VALVE

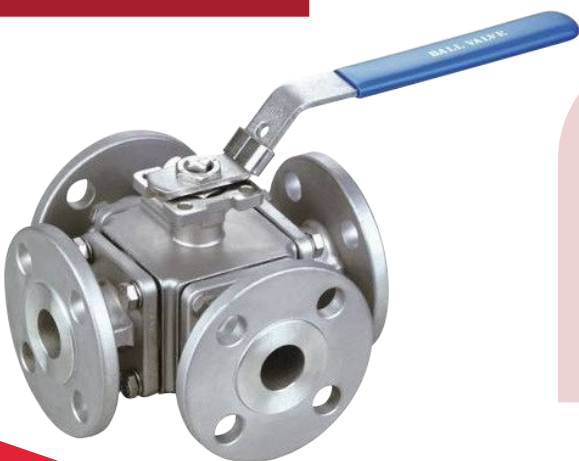

**Size** : 1/2 " to 4 "  
**Brand** : Shreekar  
**Material** : Satainless Steel  
**Grade** : SS 304, SS 316  
**Pressure Temperature** : Medium  
**Connector Type** : Flanged End / BSP Threaded  
150 Class/ E table/ F Table

## VICTAULIC TYPE COUPLING SHREEKAR

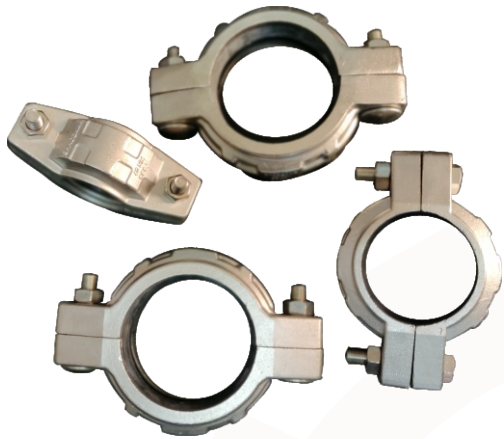

**Available Size** : 3/4" to 12"  
**Style** : 77 / 75  
**Material** : SS 304 SS 316, Duplex Steel etc..  
**Rubber** : Nitrile EPDM Cilicone  
**Nut Bolt** : SS 304, SS 316, Carriage Bolt/ Hex Bolt  
**Working Pressure** : 40kg to 100kg

## NEEDLE VALVE SHREEKAR

**Available Size** : 6mm, 8mm, 15mm 20mm, 25mm  
**Pressure** : 6000 PSI  
**Material** : SS202 SS304, SS316 etc..  
**End Connection** : BSP, NPT, Thread, Male & Female



## SS BALL VALVE



**Material** : Stainless Steel  
**End Connection Type** : Screwed  
**Valve Size** : 1/4" to 4"  
**Media** : Gas, Air, Water  
**Automation Grade** : Manual  
**Temperature of Media** : Medium  
**Grade** : SS 304, SS 316

## FLANGED BALL VALVE



**Material** : Stainless Steel  
**Size** : 1/2" - 8"  
**Pressure** : Medium / High  
**Connector Type** : Flanged End / BSP Threaded,  
150 Class/E Table / F Table  
**Brand** : SHREEKAR  
**Temperature of Media** : Medium  
**Grade** : SS 304, SS316

## SS DISK CHECK VALVE

**Available Size** : 1/2" to 8"  
**Body Construction** : ASTM A 351 Gr. CF8 / CF8M  
**Disc** : AISI 304 or AISI 316 (Bar Stock)  
**Spring** : Standard  
**Spring Retainer** : AISI 304 or AISI 316  
**Disc Seat** : Metal to Metal EPDM/Nitrile  
**Pressure Rating** : PN 40



## STAINER VALVE



**Material** : Ss304, SS316  
**Connection Type** : BSP Threaded, Flanged 150 Class  
**Valve Size** : 1/4" to 8"

## BAR STROKE BALL VALVE



**Available Size** : 15mm to 50mm  
**Pressure** : 1000 PSI  
**Material** : S.S 202, S.S 304, S.S 316 etc..  
**Boll/Pin** : S.S 304, S.S 316  
**End Connection** : BSP THREAD , NPT THREAD  
**Disc Seat** : PTFE TAFLONE


**STAINLESS STEEL**  
SS Butterfly Valve  
SS Plug Valve  
TC Ball Valve

**Usage/Application** : Milk Vending Machine  
**Material** : Stainless Steel 304 / 316  
**Finishing** : Polished  
**Size** : 1/4" to 4"

## SS DAIRY VALVE



## VERTICAL CHECK VALVE

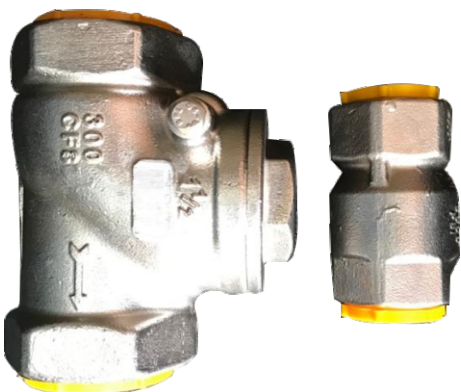

**Available Size** : 15mm to 50mm  
**Pressure** : 4000 PSI  
**Material** : S.S 304, S.S 316 etc..  
**Spring** : Standard  
**End Connection** : BSP THREAD , NPT THREAD  
**Disc Seat** : Metal to Metal / EPDM

## SS TRI CLOVER CLAMP



**Stainless Steel**  
Elbow, Tee, Union, Hex Nipple,  
Hose Nipple, Coupling.

**Material Grade** : SS304, SS316  
**Connection** : MALE, FEMALE THREADED  
**Surface Finish** : ELECTRO POLISHED  
**Thread Size** : BSP OR BSPT OR NPT

**Material Grade** : SS202, SS304, SS316  
**Finishing** : Polished  
**Size Range** : 1" to 12"

## INVESTMENT PIPE FITTINGS



**Stainless Steel**  
Elbow, Tee, Union, Hex Nipple,  
Hose Nipple, Coupling, Flanged.

**Material Grade** : SS304, SS316  
**Connection** : WELDED  
**Surface Finish** : MATT FINISH  
**Thread Size** : 1/4" TO 8"

## STAINLESS STEEL VALVE FITTINGS



**CAST IRON BODY AND SS 304 AND SS 316**  
**DIS** : SS 304 AND SS 316 AND C.I  
**SEATS** : EPDM / NITRILE  
**RATING** : PN10 AND PN60  
**SIZE** : 1.5" TO 24"

## BUTTERFLY VALVES





# **BOSS** **INDUSTRIES**



---

M.P. Park, Nr. Niketa Welding, Plot No. 44, Alka Society,  
Opp. Mavdi Fire Brigade, Amar Nagar Road, Rajkot, GJ, 360 004, IN

 **+91 96016 75270**



**Sales.bossindustries@gmail.com**

 **www.bossindustries.in**